







Metal Point® boltless shelving

This shelving has endless uses and applications in your warehouse, office or retail establishment. It holds any kind of small to medium load you need to store. Keep everything in perfect order in a Metal Point® shelf that is right for you!

Thanks to the quality of the steel, the advanced manufacturing systems and its simple yet exclusive assembly, Metal Point* shelving is far superior to other picking systems on the market.

Customizable shelves are available with wire decking or standard particle board.

2 Metal Point Boltless Shelving interlakemecalux.com



All pieces fit together quickly and easily. Simply use a plastic

or rubber mallet for a perfect boltless assembly.



Fully modular


Extra modules or additional levels with raised walkways can be added, making installation possible in any location or for any business.



Paint guarantees a long-lasting and perfect finish due to advanced technology.





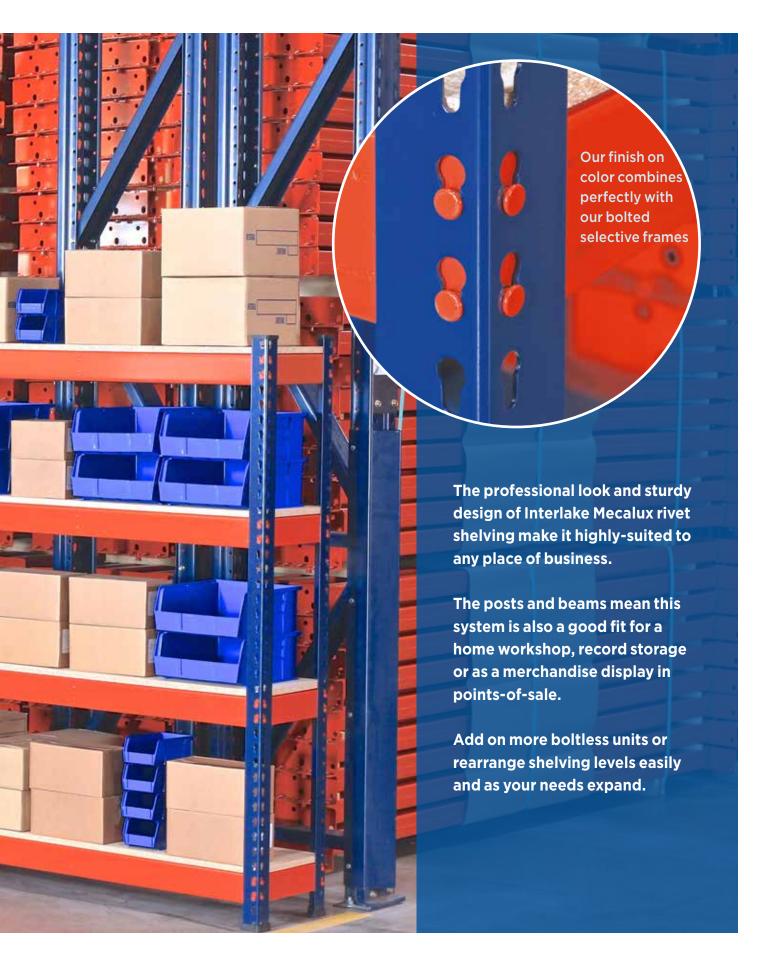



Metal Point® Plus

Ideal for storing heavy items or products in your warehouse, workshop, store, business, office or any other industrial premises. Metal Point® is available in a variety of sizes and can be adapted to suit any need.

The simple structure makes it possible to install several load levels, up to a maximum 144.57" high. It is also easy to extend the warehouse's length simply by adding as many modules as necessary.

Particle board panels are the most commonly used, as they provide support for up to 2,112 lbs, uniformly distributed per load level.

Standard colors

Posts Cross beams RAL 5019 RAL 2004 RAL 7037 RAL 7037



1. Post

2. Cross beam


3. Particle board panel

4. Side beam

5. Center support

6. Plastic foot cover

6 Metal Point Boltless Shelving interlakemecalux.com

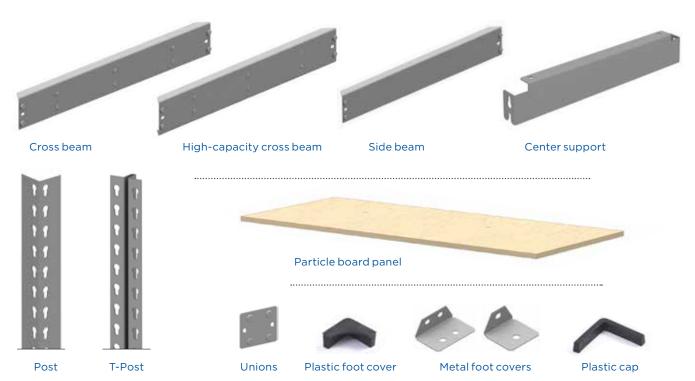

| LENGTH COMPONENTS | | | | | | | | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Length | 12" | 15" | 18" | 24" | 30" | 36" | 42" | 48" | 60" | 72" | 84" | 96" | 120" |
| Post | | | | | | | | | | Х | Х | Х | х |
| T-Post | | | | | | | | | | Х | Х | Х | х |
| Center support | х | х | х | х | х | х | х | х | | | | | |
| Cross beam | | | | | | | | х | х | Х | х | Х | |
| High-capacity cross beam | | | | | | | | | | Х | х | Х | |
| Side beam | х | х | х | х | х | х | х | х | | | | | |

| MAXIMUM LOAD PER SHELF | | | | | | | | | | | | | |
|-----------------------------|----------------------------|-------|-------|-------|-------|-------|-------|----------------------------|-------|-------|-------|--|--|
| Depth | Bays 12" / 15" / 18" / 24" | | | | | | | Bays 30" / 36" / 42" / 48" | | | | | |
| | 48" 60" 72" 84" 96" | | | | | | 48" | 60" | 72" | 84" | 96" | | |
| | ONSTS | 1,870 | 1,230 | 420 | - | - | 1,710 | 1,230 | 440 | - | - | | |
| Cross beam | 1N STS | 2,420 | 1,940 | 990 | 400 | 250 | 1,810 | 1,410 | 990 | 400 | 250 | | |
| | 2 N STS | - | 2,000 | 1,100 | 750 | 530 | - | 1,540 | 1,100 | 750 | 530 | | |
| High canacity | ONSTS | 2,310 | 1,760 | 1,320 | 880 | 550 | 1,870 | 1,760 | 1,290 | 830 | 440 | | |
| High-capacity cross beam | 1N STS | 2,530 | 1,980 | 1,340 | 1,320 | 1,200 | 2,030 | 1,810 | 1,590 | 1,370 | 1,100 | | |
| | 2 N STS | - | 2,310 | 1,540 | 1,430 | 1,280 | - | 2,310 | 1,760 | 1,540 | 1,280 | | |

Maximum load per shelf in lb. Shelves with 5/8" thick particle board panels.

| | MAXIMUM LOAD PER BAY | | | | | | | | | | | |
|-----------|----------------------|---------|-----------|---------|-----------|---------|-----------|---------|--|--|--|--|
| | Post 84" | | Post | t 96" | Post | 120" | Post 144" | | | | | |
| Nº Levels | Per level | Per bay | Per level | Per bay | Per level | Per bay | Per level | Per bay | | | | |
| 3 | 2,310 | 6,930 | 2,290 | 6,870 | | | | | | | | |
| 4 | 2,150 | 8,600 | 2,140 | 8,560 | 1,280 | 5,120 | 1,190 | 4,760 | | | | |
| 5 | 1,870 | 9,350 | 1,850 | 9,250 | 1,210 | 6,050 | 1,120 | 5,600 | | | | |
| 6 | 1,650 | 9,900 | 1,650 | 9,900 | 1,100 | 6,600 | 1,060 | 6,360 | | | | |
| 7 | - | - | 1,430 | 10,010 | 1,060 | 7,420 | 990 | 6,930 | | | | |
| 8 | - | - | 1,100 | 8,800 | 920 | 7,360 | 900 | 7,200 | | | | |
| 9 | - | _ | - | - | 880 | 7,920 | 860 | 7,740 | | | | |
| 10 | - | _ | - | - | - | - | 840 | 8,400 | | | | |

Maximum load per bay in lb.




Metal Point® 2

An attractive design means these shelves can be adapted to any setting where medium size loads need to be stored.


Particle board panels provide support for up to 1,102 lbs, uniformly distributed per load level.

Standard colors




Basic Components

- 1. Post
- 2. Beam
- 3. Particle board panel
- 4. Plastic foot cover

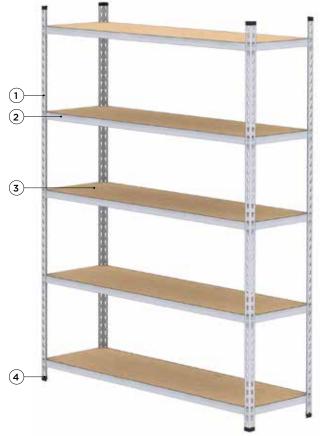

8 Metal Point Boltless Shelving interlakemecalux.com



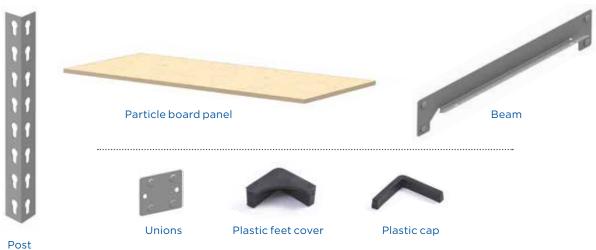

| LENGTH COMPONENTS | | | | | | | | | | | | | |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Length | 12" | 15" | 18" | 24" | 30" | 36" | 42" | 48" | 60" | 72" | 84" | 96" | 120" |
| Post | | | | | | | | | | х | х | х | х |
| Cross beam | х | х | х | х | х | х | х | х | х | | | | |
| Side beam | х | х | х | х | х | х | х | х | х | | | | |

| MA | MAXIMUM LOAD PER SHELF | | | | | | | | | |
|-------|------------------------|-----|-----|-----|--|--|--|--|--|--|
| Depth | 24" | 36" | 42" | 48" | | | | | | |
| 12" | 470 | 340 | 270 | 250 | | | | | | |
| 15" | 550 | 390 | 310 | 280 | | | | | | |
| 18" | 700 | 450 | 350 | 290 | | | | | | |
| 24" | 780 | 490 | 400 | 320 | | | | | | |

Maximum load per shelf in lb. Shelves with 5/8" thick particle board panels.

| | MAXIMUM LOAD PER BAY | | | | | | | | | |
|----------------|----------------------|---------|-----------|---------|-----------|---------|--|--|--|--|
| | Post | 87" | Post | 96" | Post 120" | | | | | |
| Nº Le- vels | Per level | Per bay | Per level | Per bay | Per level | Per bay | | | | |
| 3 | 660 | 1,980 | 440 | 1,320 | - | - | | | | |
| 4 | 950 | 3,800 | 670 | 2,680 | 460 | 1,840 | | | | |
| 5 | 1,050 | 5,250 | 830 | 4,150 | 580 | 2,900 | | | | |
| 6 | 1,070 | 6,420 | 870 | 5,220 | 690 | 4,140 | | | | |
| 7 | - | - | 860 | 6,020 | 750 | 5250 | | | | |
| 8 | - | - | 830 | 6,640 | 750 | 6,000 | | | | |
| 9 | - | - | - | - | 710 | 6,390 | | | | |

Maximum load per bay in lb.



Applications

This system offers a wide range of versatile solutions, such as shelves, benches, tables, cupboards and more.














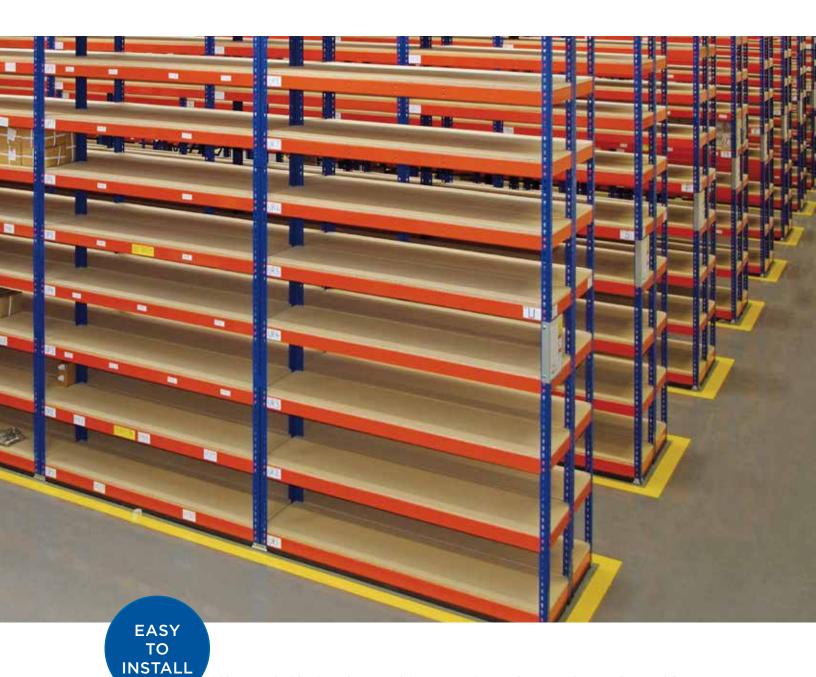

ASSEMBLY IS EASY! ALL YOU NEED IS A RUBBER MALLET TO PUT THE SHELVING UNIT TOGETHER.





Tel. 1-877-632-2589 - info@interlakemecalux.com - interlakemecalux.com

SALES OFFICES

ATLANTA

3525 Piedmont Road, Building 5, Suite 400 Atlanta, GA, 30305

CHICAGO

1600 North 25th Ave. Melrose Park, IL 60160

DALLAS

3333 West University Drive BLDG 2 unit 2105, Denton TX 76207

SAN DIEGO

8607 Ave. De La Fuente San Diego, CA 92154

PRODUCTION PLANTS

CHICAGO

1600 North 25th Avenue Melrose Park, IL 60160

MATAMOROS

Las Rusias 2700, Industrial del Norte Matamoros Tamaulipas, C.P. 87316

PONTIAC

701 Interlake Drive Pontiac, IL 61764

ANAULIT

Blvd. Bellas Artes, 9001 Ciudad Industrial Nueva Tijuana Tijuana, B.C. - C.P. 22444

OFFICES WORLDWIDE

Argentina - Belgium - Brazil - Canada - Chile - Colombia - Czechia - Croatia - France - Germany - Italy - Mexico Netherlands - Poland - Portugal - Romania - Slovakia - Slovenia - Spain - Turkey - United Kingdom - Uruguay - USA















